



1. PHYSICAL CHARACTERISTICS (mm)

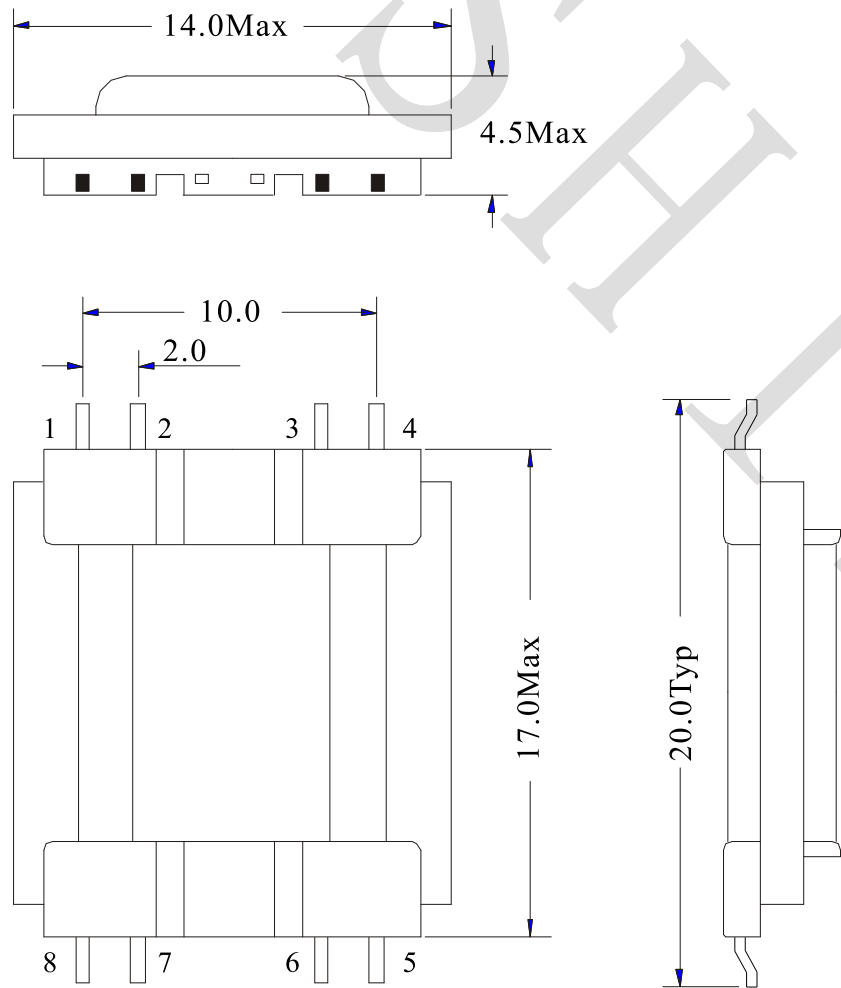

2. ELECTRONICAL SCHEMATIC

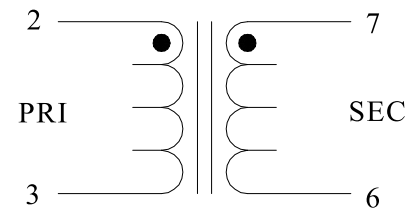

3. ELECTRONICAL SPECIFICATIONS

Isolation voltage: 1000Vrms(Winding to Winding)

Turns ratio: Pin2-3 : Pin7-6=1:1

Pin1-2 inductance: 4.3H Min@1KHz,1V

Pin2-3 DCR: 200 Ω Max

Pin7-6 DCR: 230 Ω Max

Insertion loss: 3.0dB Max@1KHz,1V@Load 600 Ω

Note:

1.Solderability:leads shall meet MIL-STD-202,

Method 208D for solderability.

2.Flammability: UL94V-0

3.ASTM oxygen index: >28%

4.Test Instrument: WK 3260B+3261A

NAME:	Audio transformer		
CUSTOMER P/N:		DATE:	2012-08-29
SHINHOM P/N:	ATS1202	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM

SHAANXISHINHOM ENTERPRISE CO LTD

TEL:+86-029-87851838
 FAX:+86-029-87851840
 Http://www.shinhom.com
 E-mail:sales@shinhom.com.cn
 No.8,Yanta Northern Road,Xi'an Shaanxi Pro.China